


	1	2	3	4																																																													
A	Technical sheet / Datos técnicos:																																																																
B	Part number adaptable to / Referencia adaptable a		4630460040																																																														
	Operating pressure / Presión de trabajo		max. 10 bar																																																														
	Permissible medium / Medio de funcionamiento		Air / Aire																																																														
	Operating temperature range / Rango de temperatura		-30°C to / a +150°C																																																														
	Weight / Peso		1500 gr																																																														
C																																																																	
D	<table border="1"> <thead> <tr> <th>Port / Conexión</th> <th>Function / Función</th> <th>Thread / Rosca</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Supply / Alimentación</td> <td>M12x1,5</td> </tr> <tr> <td>21</td> <td>Delivery / Salida</td> <td>M12x1,5</td> </tr> <tr> <td>22</td> <td>Delivery / Salida</td> <td>M12x1,5</td> </tr> <tr> <td>3</td> <td>Exhaust / Escape</td> <td>-</td> </tr> </tbody> </table>				Port / Conexión	Function / Función	Thread / Rosca	1	Supply / Alimentación	M12x1,5	21	Delivery / Salida	M12x1,5	22	Delivery / Salida	M12x1,5	3	Exhaust / Escape	-																																														
Port / Conexión	Function / Función	Thread / Rosca																																																															
1	Supply / Alimentación	M12x1,5																																																															
21	Delivery / Salida	M12x1,5																																																															
22	Delivery / Salida	M12x1,5																																																															
3	Exhaust / Escape	-																																																															
E	Installation requirements / Requisitos para la instalación: Mounting is accomplished with four screws M8. / El montaje se realiza mediante cuatro tornillos M8.																																																																
F	<table border="1"> <tr> <td rowspan="5">Modification</td> <td>4</td> <td></td> <td></td> <td></td> <td>Drawn</td> <td rowspan="5"> </td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td>19/10/15 A.U.</td> </tr> <tr> <td>2</td> <td></td> <td></td> <td></td> <td>Checked</td> </tr> <tr> <td>1</td> <td></td> <td></td> <td></td> <td>19/10/15 A.L.</td> </tr> <tr> <td>nº</td> <td>Modified</td> <td>Date</td> <td>Reason</td> <td>General Tolerance</td> <td>Assembly</td> <td>-</td> </tr> <tr> <td colspan="5">Comments</td> <td>-</td> <td>Part name</td> <td>Gearbox valve</td> </tr> <tr> <td colspan="5"></td> <td>Material</td> <td>ID. Reference</td> <td>2216100</td> </tr> <tr> <td colspan="5"></td> <td>-</td> <td>Scale: -</td> <td rowspan="2"> </td> <td rowspan="2">Sheet 1/2</td> </tr> <tr> <td colspan="5"></td> <td>-</td> <td>Review: 0</td> </tr> </table>				Modification	4				Drawn		3				19/10/15 A.U.	2				Checked	1				19/10/15 A.L.	nº	Modified	Date	Reason	General Tolerance	Assembly	-	Comments					-	Part name	Gearbox valve						Material	ID. Reference	2216100						-	Scale: -		Sheet 1/2						-	Review: 0
Modification	4					Drawn																																																											
	3					19/10/15 A.U.																																																											
	2					Checked																																																											
	1					19/10/15 A.L.																																																											
	nº	Modified	Date	Reason	General Tolerance	Assembly		-																																																									
Comments					-	Part name	Gearbox valve																																																										
					Material	ID. Reference	2216100																																																										
					-	Scale: -		Sheet 1/2																																																									
					-	Review: 0																																																											
	PG/18/02 rev.1 1	2	3	4																																																													

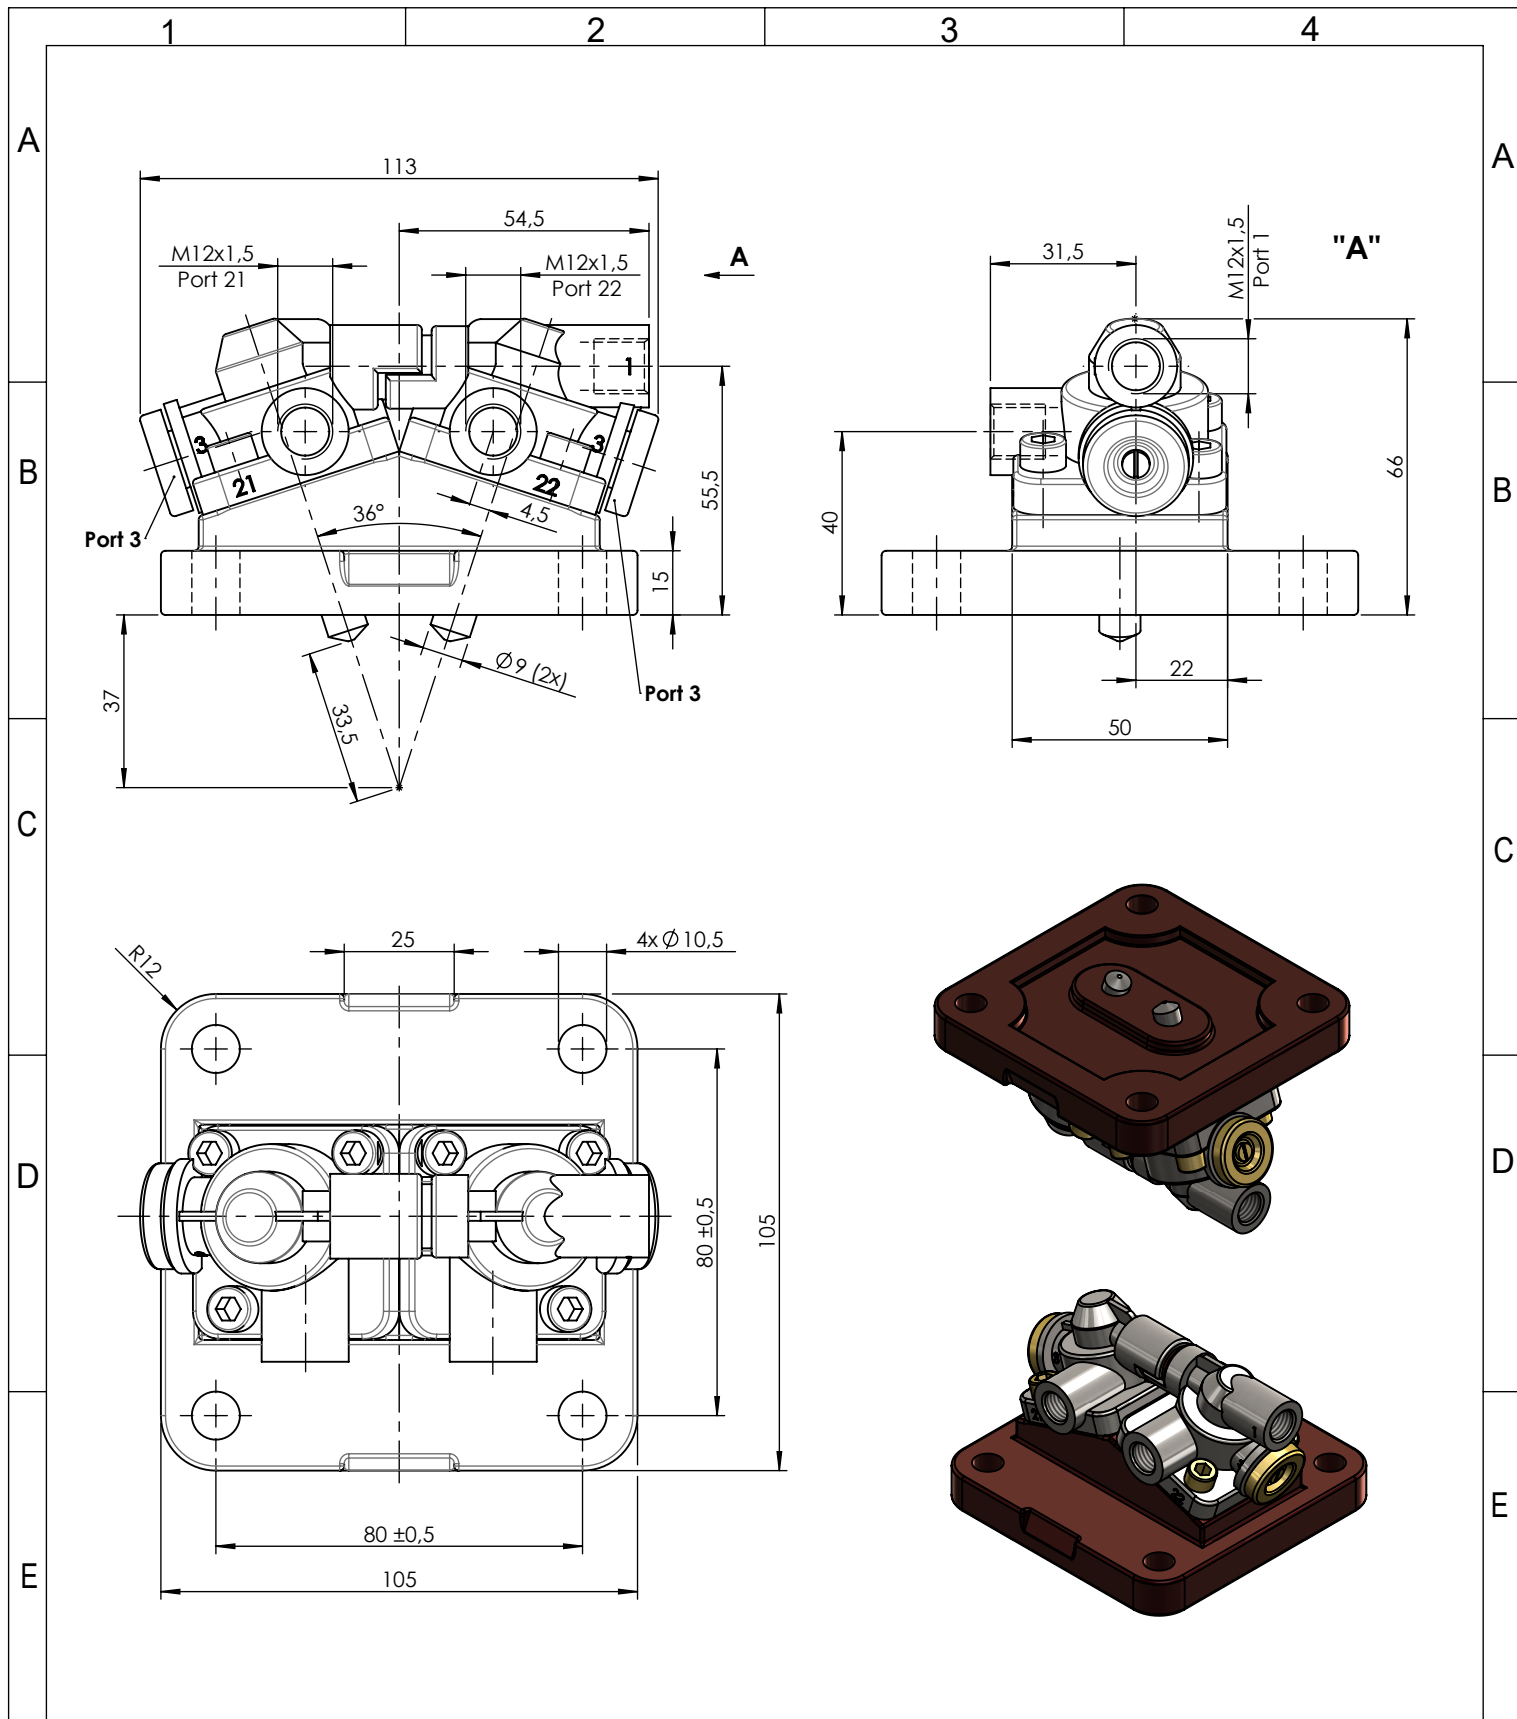

F	Modification	4				Drawn			F
		3				19/10/15 A.U.			
		2				Checked			
		1				19/10/15 A.L.			
		nº	Modified	Date	Reason	General Tolerance			
	Comments				ISO 2768 c-K	Part name	Gearbox valve		
					Material	ID. Reference	2216100		
-					Scale: 2/3		Sheet 2/2		
					Review: 0				
PG/18/02 rev.1 1			2		3		4		