
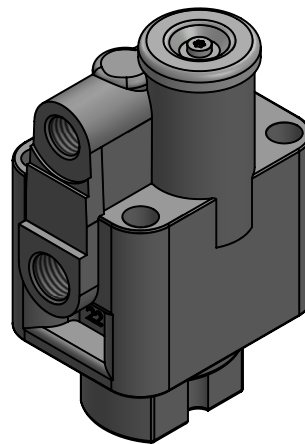
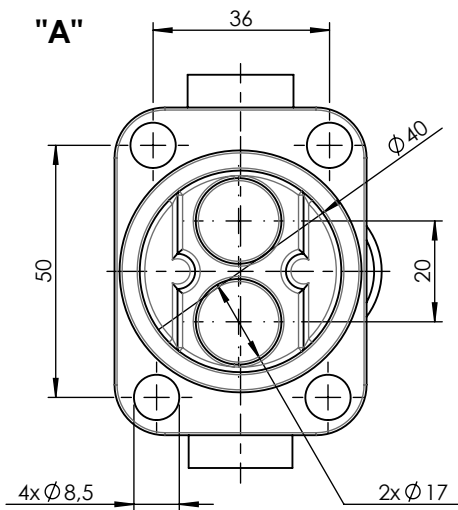
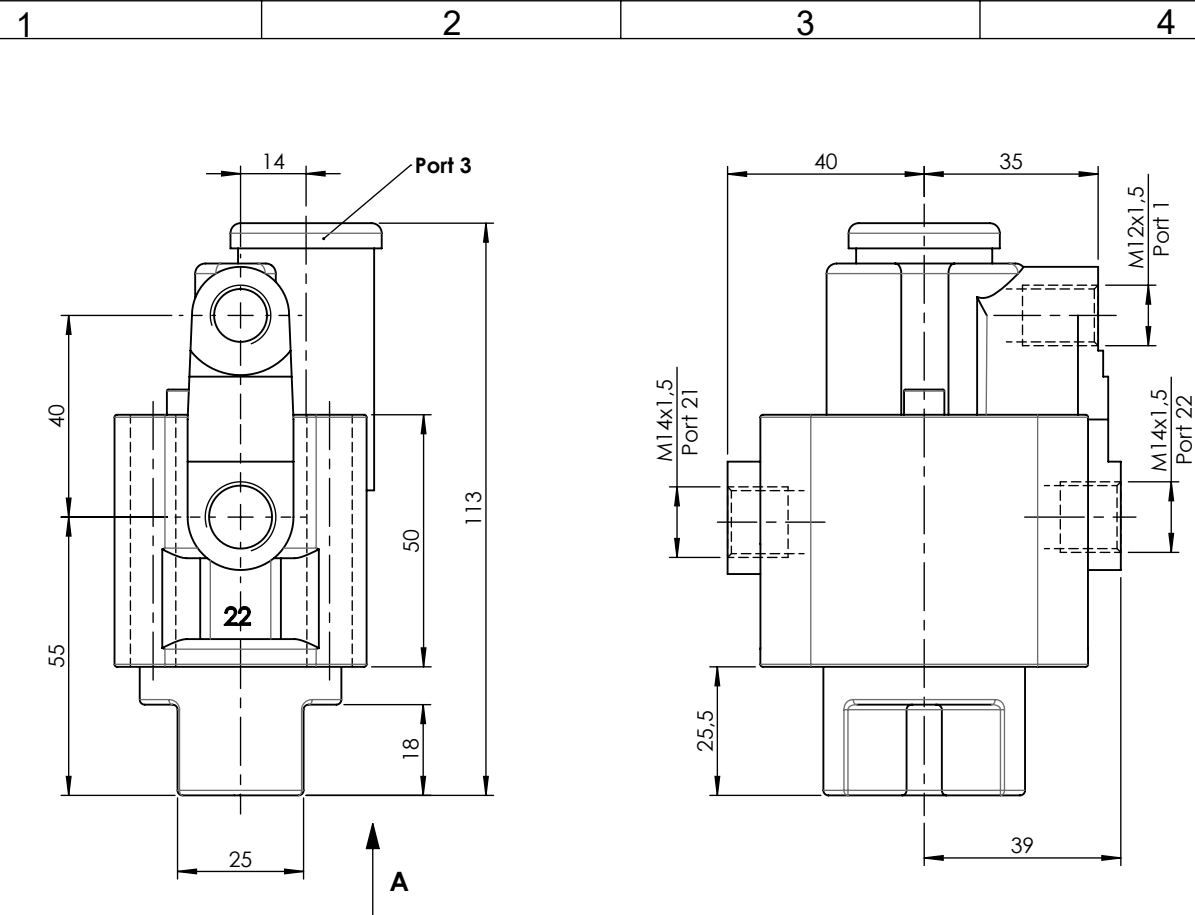


1		2		3		4		
A Technical sheet / Datos técnicos:								
Part number adaptable to / Referencia adaptable a						6038202045		
Operating pressure / Presión de trabajo						max. 10 bar		
Permissible medium / Medio de funcionamiento						Air / Aire		
Operating temperature range / Rango de temperatura						-40 °C to / a +80 °C		
Weight / Peso						550 gr		
B								
C								
D								
Port / Conexión		Function / Función			Thread / Rosca			
1		Supply / Alimentación			M12x1,5			
21		Delivery / Salida			M14x1,5			
22		Delivery / Salida			M14x1,5			
3		Exhaust / Escape			-			
E								
Installation requirements / Requisitos para la instalación:								
Mounting is accomplished with four screws M8. It's necessary to install the pushers (not included with the valve (ref.: 6019510)) / El montaje se realiza mediante cuatro tornillos M8. Es necesario instalar los pulsadores (no incluidos con la válvula (ref.: 6019510))								
F								
Modification	4					Drawn		
	3					26/08/15 A.U.		
	2					Checked		
	1					26/08/15 A.L.		
	nº	Modified	Date	Reason	General Tolerance	Assembly	-	
Comments					-	Part name	Gearbox valve	
					Material	ID. Reference	2816002	
					-	Scale: -		Sheet 1/2
					-	Review: 0		
PG/18/02 rev.1 1		2		3		4		



F	Modification	4				Drawn			F
		3				26/08/15 A.U.			
		2				Checked			
		1				26/08/15 A.L.			
		nº	Modified	Date	Reason	General Tolerance	Assembly	-	
Comments					ISO 2768 c-K	Part name	Gearbox valve		
					Material	ID. Reference	2816002		
					-	Scale: 2/3			
						Review: 0			Sheet 2/2
PG/18/02 rev.1 1			2		3		4		